

INTRODUCTION

Communication may be broadly defined as the transfer of information from one point to another. When the information is to be conveyed over any distance a communication system is usually required. Within a communication system the information transfer is frequently achieved by superimposing or modulating the information onto an electromagnetic wave which acts as a carrier for the information signal. This modulated carrier is then transmitted to the required destination where it is received and the original information signal is obtained by demodulation. Sophisticated techniques have been developed for this process using electromagnetic carrier waves operating at radio frequencies as well as microwave and millimeter wave frequencies. However, 'communication' may also be achieved using an electromagnetic carrier which is selected from the optical range of frequencies

Communication is defined as the transfer of information from one point to another. The function of communication system is to convey signal from source to destination over transmission medium.

Communication system consists of

1. Transmitter/ modulator linked to information source.
2. Transmission medium.
3. Receiver/ demodulator at destination point.

Interest in communicating at optical frequencies was created in 1960.

Electrical communication was started in 1837 with the invention of telegraph by Samuel F.B. Morse. Advanced telegraph was invented in 1874 with 120 bits per second. In 1876, Alexander Graham Bell invented telephone to transmit voice signal in analog form. In 19's LASER was discovered. Around 1980's optical fiber technology becomes back bone for long distance communication. Around

1970's, optical fiber has low loss window around 800 nm. Optical source is made of GaAs which emit light at 800 nm. This is first window. As glass purification technology improved during 1980's, optical source is made of silica. So in 1980's optical communication is shifted to 1300 nm band. This is second window. In 1990's the communication was shifted to 1550 nm due to the invention of erbium doped fiber amplifier (EDFA). This is third window.

First operating window:

Centered at 850 nm.

Fibers silica multi mode fiber

Sources GaAlAs based sources

Photo detector Silicon Photo detector.

Optical amplifier GaAlAs based amplifiers.

Used in initial telephone system in USA around 1977.

Second Operating window:

Centered at 1310 nm

Fibers Single mode and Multi mode fiber

Sources InGaAsP based sources

Photo detector InGaAs Photo detector.

Optical amplifier PDFA (Praseodymium doped fiber amplifiers). By this repeater is reduced.

Optical fiber exhibit low power loss and less signal dispersion.

Third operating window:

Centered around 1500 nm.

Fibers Dispersion Shifted fiber

Sources InGaAsP based sources

Photo detector InGaAs Photo detector.

Optical amplifier EDFA (Erbium doped fiber amplifiers).

Used in metropolitan networks.

Fiber optics deals with the study of propagation of light through transparent dielectric waveguides. A fiber optic cable is essentially a light pipe that is used to carry a light beam from one place to another. The carrier frequencies used in conventional systems had the limitations in handling the volume and data rate of data transmission. The greater the carrier frequency larger the available bandwidth and information carrying capacity.

The first generation of light wave systems uses GaAs semiconductor laser and operating region was near $0.8\mu\text{m}$. Other specifications of this generation are as under:

First generation

Bit rate : 45 Mb/s
Repeater spacing : 10 km

Second generation

Bit rate : 100 Mb/s to 1.7 Gb/s
Repeater spacing : 50 km
Operating wavelength : $1.3\mu\text{m}$
Semiconductor : In GaAsP

Third generation

Bit rate : 10 Gb/s
Repeater spacing : 100 km
Operating wavelength : $1.55\mu\text{m}$

Fourth generation

Fourth generation uses WDM technique.

Bit rate : 10 Tb/s
Repeater spacing : $> 10,000\text{ km}$.
Operating wavelength : $1.45\text{ to }1.62\mu\text{m}$

Fifth generation

Fifth generation uses Raman amplification technique and optical solitons.

Bit rate : 40 Gb/s to 160 Gb/s
Repeater spacing : 24000 km to 35000 km
Operating wavelength : $1.53\text{ to }1.57\mu\text{m}$

S.	Characteristics	Optical fiber	Satellite link
1	Bandwidth	1 to 10GHz	36 to 72 MHz
2	Immunity to interference	Immune to electromagnetic	Subject to interference from various sources
3	Security	Difficult to tap without defection	Signals must be encrypted for security
4	Flexibility	Difficult to reconfigure to meet	Easy to configure
5	Multipoint capability	Point to point mainly	Point to multipoint
6	Connectivity to customer end	Local loop required	Local loop not required but antenna is needed at customer site.

The general system:

An optical fiber communication system is similar in basic concept to any type of communication system. A block schematic of a general communication system is shown in Figure 1.2(a), the function of which is to convey the signal from the information source over the transmission medium to the destination. The communication system therefore consists of a transmitter or modulator linked to the information source, the transmission medium, and a receiver or demodulator at the destination point. In electrical communications the information source provides an electrical signal, usually derived from a message signal which is not electrical (e.g. sound), to a transmitter comprising electrical and electronic components which converts the signal into a suitable form for propagation over the transmission medium. This is often achieved by modulating a carrier, which, as mentioned previously, may be an electromagnetic wave.

For optical fiber communications the system shown in Figure 1.1(a) may be considered in slightly greater detail, as given in Figure 1.1(b). In this case the information source provides an electrical signal to a transmitter comprising an electrical stage which drives an optical source to give modulation of the light wave carrier. The optical source which provides the electrical–optical conversion may be either a semiconductor laser or light-emitting diode (LED).

The transmission medium consists of an optical fiber cable and the receiver consists of an optical detector which drives a further electrical stage and hence provides demodulation of the optical carrier. Photodiodes ($p-n$, $p-i-n$ or avalanche) and, in some instances, phototransistors and photoconductors are utilized for the detection of the optical signal and the optical–electrical conversion. Thus there is a requirement for electrical interfacing at either end of the optical link and at present the signal processing is usually performed electrically.

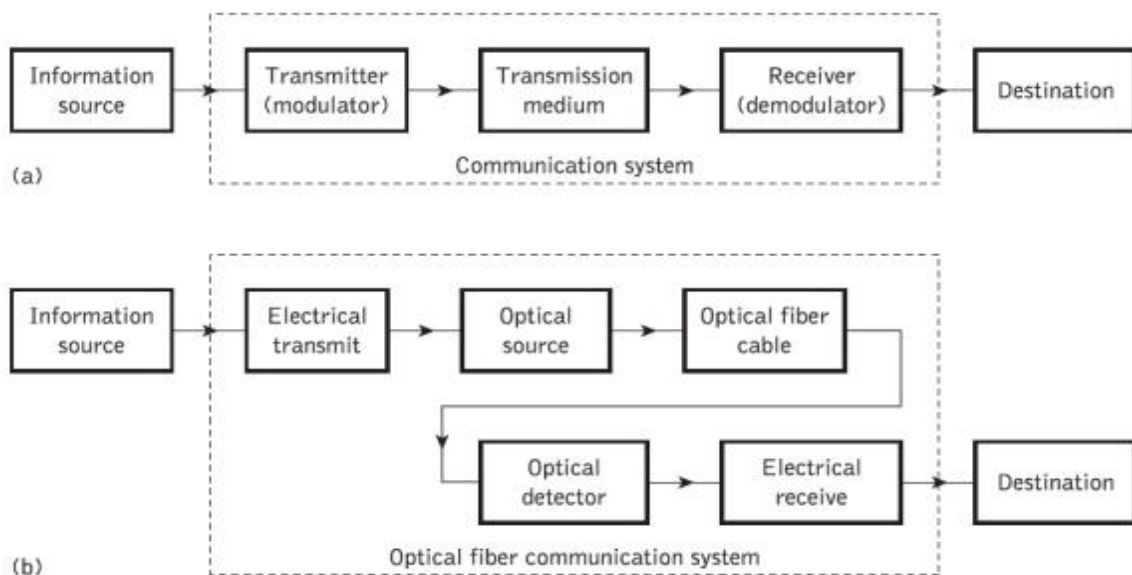


Figure 1.1 (a) The general communication system. (b) The optical fiber communication system

[Source: <http://img.brainkart.com>]

The optical carrier may be modulated using either an analog or digital information signal. In the system shown in Figure 1.1(b) analog modulation involves the variation of the light emitted from the optical source in a continuous manner. With digital modulation, however, discrete changes in the light intensity are obtained (i.e. on–off pulses). Although often simpler to implement, analog modulation with an optical fiber communication system is less efficient, requiring a far higher signal-to-noise ratio at the receiver than digital modulation. Also, the linearity needed for analog modulation is not always provided by semiconductor optical sources, especially at high modulation frequencies. For these reasons, analog optical fiber communication links are generally limited to shorter distances and lower bandwidth operation than digital links.

The transmission of light via a dielectric waveguide structure was first proposed and investigated at the beginning of the twentieth century. In 1910 Hondros and Debye conducted a theoretical study, and experimental work was reported by Schriever in 1920. However, a transparent dielectric rod, typically of silica glass with a refractive index of around 1.5, surrounded by air, proved to be an impractical waveguide due to its unsupported structure (especially when very thin waveguides were considered in order to limit the number of optical modes propagated) and the excessive losses at any discontinuities of the glass–air interface. Nevertheless, interest in the application of dielectric optical waveguides in such areas as optical imaging and medical diagnosis (e.g. endoscopes) led to proposals for a clad dielectric rod in the mid-1950s in order to overcome these problems. This structure is illustrated in Figure 2.1, which shows a transparent core with a refractive index n_1 surrounded by a transparent cladding of slightly lower refractive index n_2 . The invention of the clad waveguide structure led to the first serious proposals by Kao and Hockham and

Werts, in 1966, to utilize optical fibers as a communications medium, even though they had losses in excess of 1000 dB km^{-1} .

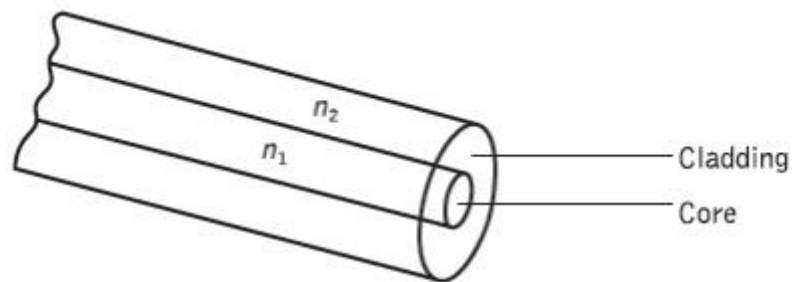


Figure 1.1 (c) Optical fiber waveguide showing the core of refractive index n_1 , surrounded by the cladding of slightly lower refractive index n_2

[Source: <http://img.brainkart.com>]

These proposals stimulated tremendous efforts to reduce the attenuation by purification of the materials. This has resulted in improved conventional glass refining techniques giving fibers with losses of around 4.2 dB km . Also, progress in glass refining processes such as depositing vapor-phase reagents to form silica allowed fibers with losses below 1 dB km to be fabricated.

Most of this work was focused on the 0.8 to $0.9 \mu\text{m}$ wavelength band because the first generation of optical sources fabricated from gallium aluminium arsenide alloys operated in this region. However, as silica fibers were studied in further detail it became apparent that transmission at longer wavelengths (1.1 to $1.6 \mu\text{m}$) would result in lower losses and reduced signal dispersion. This produced a shift in optical fiber source and detector technology in order to provide operation at these longer wavelengths. Hence at longer wavelengths, especially around $1.55 \mu\text{m}$, typical high-performance fibers have losses of 0.2 dB km .

As such losses are very close to the theoretical lower limit for silicate glass fiber, there is interest in glass-forming systems which can provide low-loss transmission in the mid infrared (2 to 5 μm) optical wavelength regions. Although a system based on fluoride glass offers the potential for ultra-low-loss transmission of 0.01 dB km at a wavelength of 2.55 μm , such fibers still exhibit losses of at least 0.65 dB km properties of silica fibers.

In order to appreciate the transmission mechanism of optical fibers with dimensions approximating to those of a human hair, it is necessary to consider the optical waveguide of a cylindrical glass fiber. Such a fiber acts as an open optical waveguide, which may be analyzed utilizing simple ray theory. However, the concepts of geometric optics are not sufficient when considering all types of optical fiber, and electromagnetic mode theory must be used to give a complete picture. The following sections will therefore outline the transmission of light in optical fibers prior to a more detailed discussion of the various types of fiber.

Advantages of optical fiber communication:

Wider bandwidth and greater information capacity.

Lower losses.

Small size and light weight.

Signal security.

Repeaters spacing.

Environmental immunity.

Low cost and ease of maintenance.

System reliability.

Long distance transmission

Safe and easy installation

Disadvantages of optical fiber communication:

- High initial cost
- Maintenance and repairing cost high.
- Joining and test procedure
- Tensile stress
- Fiber losses

Applications of optical fiber communication:

- Used in telecommunication, instrumentation, cable TV network (CATV) and data transmission and distribution.
- Used in telephone system because of small size and large information carrying capacity. Used for transmitting digital data generated by computers between CPU and peripherals between CPU and memory and between CPU's.

