

UNIT IV

ENERGY STORING ELEMENTS AND ENGINE COMPONENTS

CHAPTER 1

Introduction of Spring


A spring is defined as an elastic body, whose function is to distort when loaded and to recover its original shape when the load is removed. The various important applications of springs are as follows:

1. To cushion, absorb or control energy due to either shock or vibration as in car springs, railway buffers, air-craft landing gears, shock absorbers and vibration dampers.
2. To apply forces, as in brakes, clutches and spring-loaded valves.
3. To control motion by maintaining contact between two elements as in cams and followers.
4. To measure forces, as in spring balances and engine indicators.
5. To store energy, as in watches, toys, etc.

Types of Springs

Though there are many types of the springs, yet the following, according to their shape, are important from the subject point of view.

1. Helical springs. The helical springs are made up of a wire coiled in the form of a helix and is primarily intended for compressive or tensile loads. The cross-section of the wire from which the spring is made may be circular, square or rectangular. The two forms of helical springs are compression helical spring as shown in Fig. 1.1 (a) and tension helical spring as shown in Fig. 1.1 (b). The helical springs are said to be closely coiled when the spring wire is coiled so close that the plane containing each turn is nearly at right angles to the axis of the helix and the wire is subjected to torsion. In other words, in a closely coiled helical spring, the helix angle is very small, it is usually less than 10° . The major stresses produced in helical springs are shear stresses due to twisting. The load applied is parallel to or along the axis of the spring. In open coiled helical springs, the



(a) Compression Helical Spring



(b) Tension Helical Spring


Fig 1.1 Helical Spring

[Source: "A Textbook of Machine Design by R.S. Khurmi J.K. Gupta, Page: 821]

spring wire is coiled in such a way that there is a gap between the two consecutive turns, as a result of which the helix angle is large. Since the application of open coiled helical springs are limited, therefore our discussion shall confine to closely coiled helical springs only. The helical springs have the following advantages:

- (a) These are easy to manufacture.
- (b) These are available in wide range.
- (c) These are reliable.
- (d) These have constant spring rate.
- (e) Their performance can be predicted more accurately.
- (f) Their characteristics can be varied by changing dimensions.

2. Conical and volute springs. The conical and volute springs, as shown in Fig. 1.2, are used in special applications where a telescoping spring or a spring with a spring rate that increases with the load is desired. The conical spring, as shown in Fig. 1.2 (a), is wound with a uniform pitch whereas the volute springs, as shown in Fig. 1.2 (b), are wound in the form of paraboloid with constant pitch and lead angles. The springs may be made either partially or completely telescoping. In either case, the number of active coils gradually decreases. The decreasing number of coils results in an increasing spring rate. This characteristic is sometimes utilised in vibration problems where springs are used to support a body that has a varying mass.

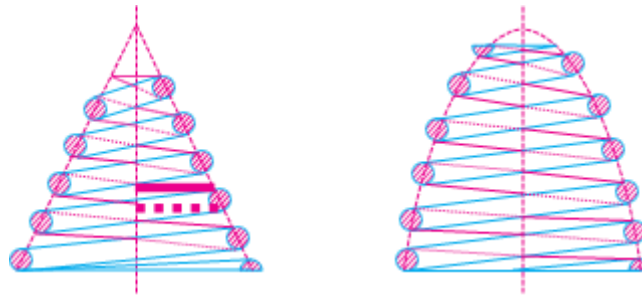


(a) Conical Spring (b) Volute Spring

Fig 1.2 Conical and volute springs.

[Source: "A Textbook of Machine Design by R.S. Khurmi J.K. Gupta, Page: 821]

The major stresses produced in conical and volute springs are also shear stresses due to twisting.

3. Torsion springs. These springs may be of helical or spiral type as shown in Fig. 1.3. The helical type may be used only in applications where the load tends to wind up the spring and are used in various electrical mechanisms. The spiral type is also used where the load tends to increase the number of coils and when made of flat strip are used in watches and clocks. The major stresses produced in torsion springs are tensile and compressive due to bending.

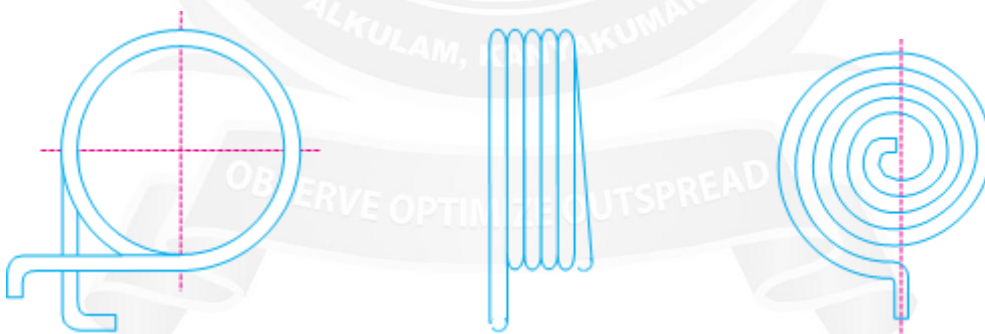

(a) Helical torsion spring.

(b) Spiral torsion spring.

Fig. 1.3 Torsion springs.

[Source: "A Textbook of Machine Design by R.S. Khurmi J.K. Gupta, Page: 822]

4. Laminated or leaf springs. The laminated or leaf spring (also known as flat spring or carriage spring) consists of a number of flat plates (known as leaves) of varying lengths held together by means of clamps and bolts, as shown in Fig. 1.4. These are

mostly used in automobiles. The major stresses produced in leaf springs are tensile and compressive stresses.

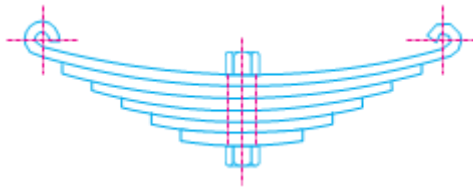


Fig. 1.4 Laminated or leaf springs.

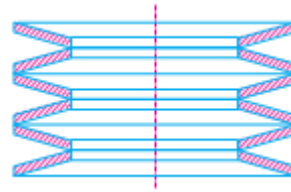


Fig. 1.5 Disc or belleville springs.

[Source: "A Textbook of Machine Design by R.S. Khurmi J.K. Gupta, Page: 822]

5. Disc or belleville springs. These springs consist of a number of conical discs held together against slipping by a central bolt or tube as shown in Fig. 1.5. These springs are used in applications where high spring rates and compact spring units are required. The major stresses produced in disc or belleville springs are tensile and compressive stresses.

6. Special purpose springs. These springs are air or liquid springs, rubber springs, ring springs etc. The fluids (air or liquid) can behave as a compression spring. These springs are used for special types of application only.

Material for Helical Springs

The material of the spring should have high fatigue strength, high ductility, high resilience and it should be creep resistant. It largely depends upon the service for which they are used i.e. severe service, average service or light service.

Severe service means rapid continuous loading where the ratio of minimum to maximum load (or stress) is one-half or less, as in automotive valve springs.

Average service includes the same stress range as in severe service but with only intermittent operation, as in engine governor springs and automobile suspension springs.

Light service includes springs subjected to loads that are static or very infrequently varied, as in safety valve springs.

The springs are mostly made from oil-tempered carbon steel wires containing 0.60 to 0.70 per cent carbon and 0.60 to 1.0 per cent manganese. Music wire is used for small

springs. Non-ferrous materials like phosphor bronze, beryllium copper, monel metal, brass etc., may be used in special cases to increase fatigue resistance, temperature resistance and corrosion resistance. The helical springs are either cold formed or hot formed depending upon the size of the wire. Wires of small sizes (less than 10 mm diameter) are usually wound cold whereas larger size wires are wound hot. The strength of the wires varies with size, smaller size wires have greater strength and less ductility, due to the greater degree of cold working.

Terms used in Compression Springs

The following terms used in connection with compression springs are important from the subject point of view.

1. Solid length. When the compression spring is compressed until the coils come in contact with each other, then the spring is said to be solid. The solid length of a spring is the product of total number of coils and the diameter of the wire. Mathematically,

Solid length of the spring,

$$L_s = n' \cdot d$$

where n' = Total number of coils, and
 d = Diameter of the wire.

2. Free length. The free length of a compression spring, as shown in Fig. 1.6, is the length of the spring in the free or unloaded condition. It is equal to the solid length plus the maximum deflection or compression of the spring and the clearance between the adjacent coils (when fully compressed).

Mathematically,

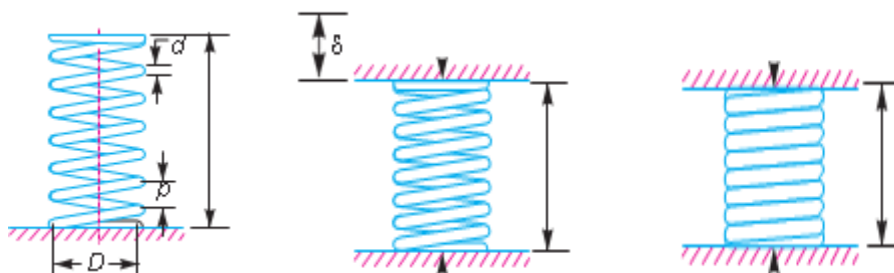


Fig 1.6 Compression spring nomenclature.

[Source: "A Textbook of Machine Design by R.S. Khurmi J.K. Gupta, Page: 825]

Free length of the spring,

$L_F = \text{Solid length} + \text{Maximum compression} + \text{*Clearance between adjacent coils (or clash allowance)}$

$$L_F = n' \cdot d + \delta_{\max} + 0.15 \delta_{\max}$$

The following relation may also be used to find the free length of the spring, i.e.

$$L_F = n' \cdot d + \delta_{\max} + (n' - 1) \times 1 \text{ mm}$$

In this expression, the clearance between the two adjacent coils is taken as 1 mm.

3. Spring index. The spring index is defined as the ratio of the mean diameter of the coil to the diameter of the wire. Mathematically,

$$\text{Spring index, } C = D / d$$

where

$D = \text{Mean diameter of the coil, and}$

$d = \text{Diameter of the wire.}$

4. Spring rate. The spring rate (or stiffness or spring constant) is defined as the load required per unit deflection of the spring. Mathematically,

$$\text{Spring rate, } k = W / \delta$$

where

$W = \text{Load, and}$

$\delta = \text{Deflection of the spring.}$

5. Pitch. The pitch of the coil is defined as the axial distance between adjacent coils in uncompressed state. Mathematically,

$$\text{Pitch of the coil, } p = \frac{\text{Free length}}{n' - 1}$$

The pitch of the coil may also be obtained by using the following relation, i.e.

$$\text{Pitch of the coil, } p = \frac{L_F - L_S}{n' - 1} + d$$

where

$L_F = \text{Free length of the spring,}$

$L_S = \text{Solid length of the spring,}$

$n' = \text{Total number of coils, and}$

d = Diameter of the wire.

In choosing the pitch of the coils, the following points should be noted:

- (a) The pitch of the coils should be such that if the spring is accidentally or carelessly compressed, the stress does not increase the yield point stress in torsion.
- (b) The spring should not close up before the maximum service load is reached.

End Connections for Compression Helical Springs

The end connections for compression helical springs are suitably formed in order to apply the load. Various forms of end connections are shown in Fig. 1.7.

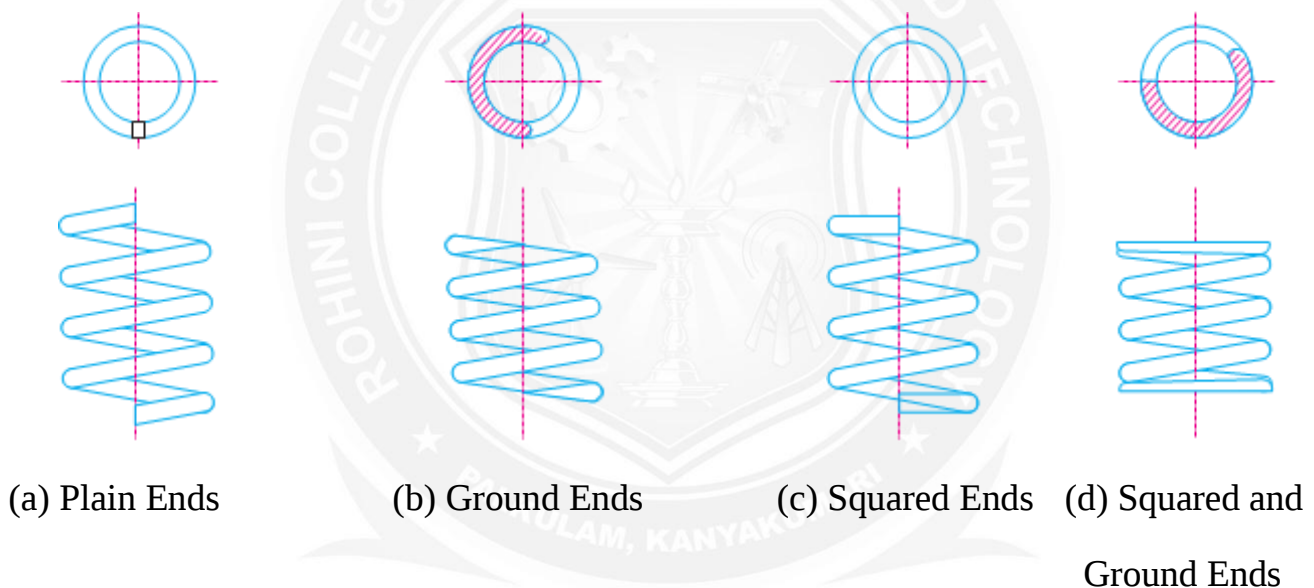


Fig 1.7 End connections for compression helical spring.

[Source: "A Textbook of Machine Design by R.S. Khurmi J.K. Gupta, Page: 826]

In all springs, the end coils produce an eccentric application of the load, increasing the stress on one side of the spring. Under certain conditions, especially where the number of coils is small, this effect must be taken into account. The nearest approach to an axial load is secured by squared and ground ends, where the end turns are squared and then ground perpendicular to the helix axis. It may be noted that part of the coil which is in contact with the seat does not contribute to spring action and hence are termed as inactive coils. The turns which impart spring action are known as active turns. As the load increases, the number of inactive coils also increases due to seating of the end coils and

the amount of increase varies from 0.5 to 1 turn at the usual working loads. The following table shows the total number of turns, solid length and free length for different types of end connections.

Table 1.1. Total number of turns, solid length and free length for different types of end connections.

Type of end	Total number of turns (n')	Solid length	Free length
1. Plain ends	n	$(n + 1) d$	$p \times n + d$
2. Ground ends	n	$n \times d$	$p \times n$
3. Squared ends	$n + 2$	$(n + 3) d$	$p \times n + 3d$
4. Squared and ground ends	$n + 2$	$(n + 2) d$	$p \times n + 2d$

[Source: "A Textbook of Machine Design by R.S. Khurmi J.K. Gupta, Page: 826]

End Connections for Tension Helical Springs

The tensile springs are provided with hooks or loops as shown in Fig. 1.8. These loops may be made by turning whole coil or half of the coil. In a tension spring, large stress concentration is produced at the loop or other attaching device of tension spring. The main disadvantage of tension spring is the failure of the spring when the wire breaks. A compression spring used for carrying a tensile load is shown in Fig. 1.9.

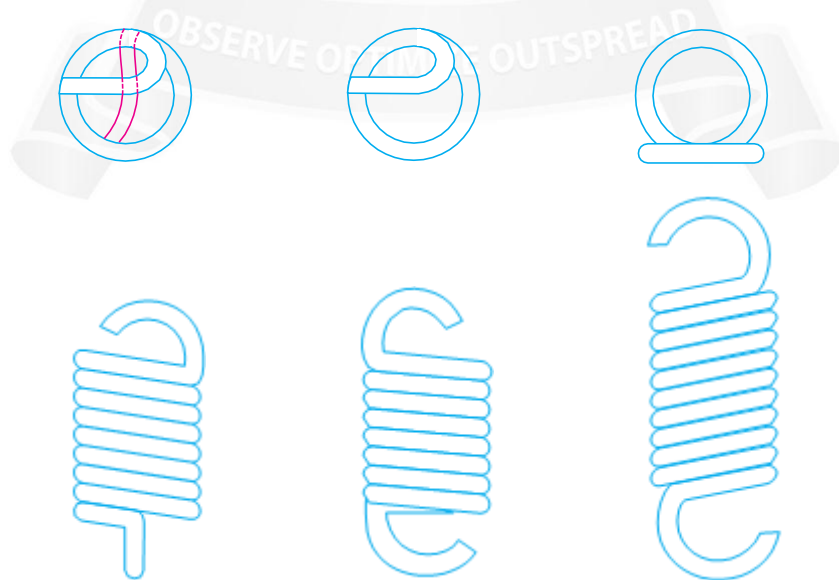


Fig 1.8 End connection for tension helical springs.

[Source: "A Textbook of Machine Design by R.S. Khurmi J.K. Gupta, Page: 827]

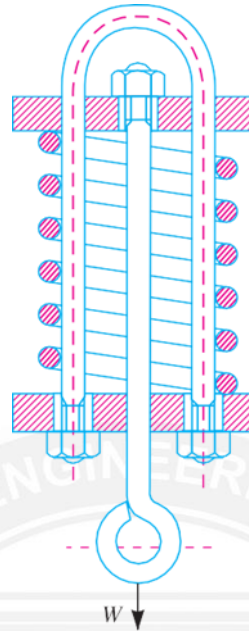


Fig 1.9 Compression spring for carrying tensile load.

[Source: "A Textbook of Machine Design by R.S. Khurmi J.K. Gupta, Page: 827]

Note: The total number of turns of a tension helical spring must be equal to the number of turns (n) between the points where the loops start plus the equivalent turns for the loops. It has been found experimentally that half turn should be added for each loop. Thus for a spring having loops on both ends, the total number of active turns,

$$n' = n + 1$$

Stresses in Helical Springs of Circular Wire

Consider a helical compression spring made of circular wire and subjected to an axial load W , as shown in Fig. 1.10 (a).

Let


- D = Mean diameter of the spring coil,
- d = Diameter of the spring wire,
- n = Number of active coils,
- G = Modulus of rigidity for the spring material,
- W = Axial load on the spring,

τ = Maximum shear stress induced in the wire,

C = Spring index = D/d ,

p = Pitch of the coils, and

δ = Deflection of the spring, as a result of an axial load W .

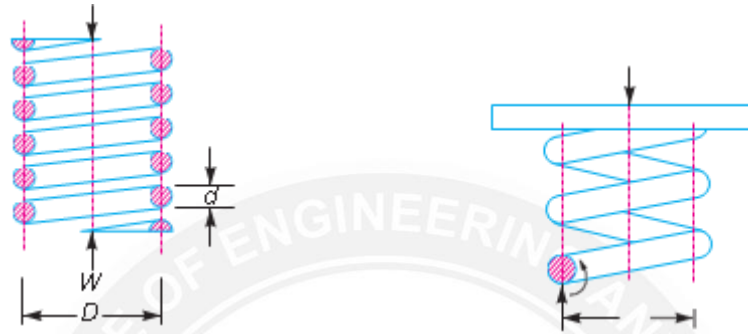

(a) Axially loaded helical spring.

(b) Free body diagram showing that wire is subjected to torsional shear and a direct shear.

Fig 1.10

[Source: "A Textbook of Machine Design by R.S. Khurmi J.K. Gupta, Page: 828]

Now consider a part of the compression spring as shown in Fig. 1.10 (b). The load W tends to rotate the wire due to the twisting moment (T) set up in the wire. Thus torsional shear stress is induced in the wire. A little consideration will show that part of the spring, as shown in Fig. 1.10 (b), is in equilibrium under the action of two forces W and the twisting moment T .

We know that the twisting moment,

$$T = W \times \frac{D}{2}$$

$$T = \frac{\pi}{16} \times \tau_1 \times d^3$$

$$\tau_1 = \frac{8 W.D}{\pi d^3}$$

The torsional shear stress diagram is shown in Fig. 1.11 (a).

In addition to the torsional shear stress (τ_1) induced in the wire, the following stresses

also act on the wire:


1. Direct shear stress due to the load W, and
2. Stress due to curvature of wire.

We know that direct shear stress due to the load W,


$$\tau_2 = \frac{\text{Load}}{\text{Cross-sectional area of the wire}}$$

$$\tau_2 = \frac{W}{\frac{\pi}{4} \times d^2} = \frac{4W}{\pi d^2}$$

The direct shear stress diagram is shown in Fig. 1.11 (b) and the resultant diagram of torsional shear stress and direct shear stress is shown in Fig. 1.11 (c).

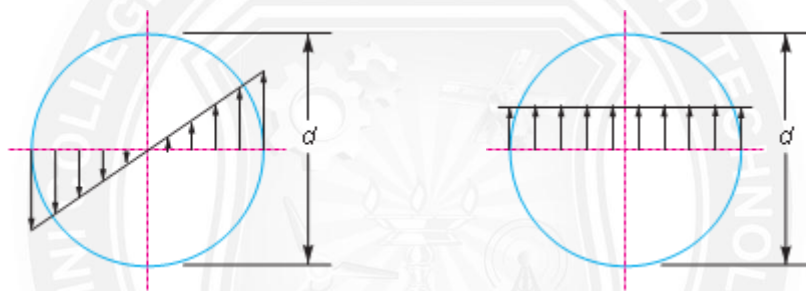

(a) Torsional shear stress diagram. (b) Direct shear stress diagram.

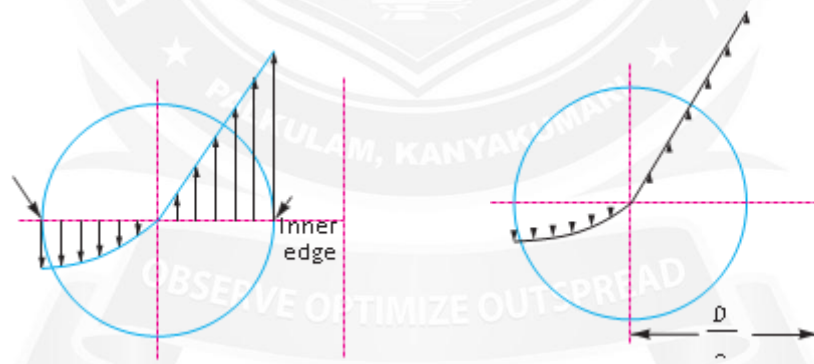

(c) Resultant torsional shear and direct shear stress diagram.

(d) Resultant torsional shear, direct shear and curvature shear stress diagram.

Fig 1.11 Superposition of stresses in a helical spring.

[Source: "A Textbook of Machine Design by R.S. Khurmi J.K. Gupta, Page: 829]

We know that the resultant shear stress induced in the wire,

$$\tau = \tau_1 \pm \tau_2$$

$$\tau = \frac{8 W.D}{\pi d^3} \pm \frac{4 W}{\pi d^2}$$

The positive sign is used for the inner edge of the wire and negative sign is used for the outer edge of the wire. Since the stress is maximum at the inner edge of the wire, therefore

Maximum shear stress induced in the wire,

$$\begin{aligned}
 &= \text{Torsional shear stress} + \text{Direct shear stress} \\
 &= \frac{8 W.D}{\pi d^3} \pm \frac{4 W}{\pi d^2} \\
 &= \frac{8 W.D}{\pi d^3} \left(1 + \frac{d}{2D}\right) \\
 &= \frac{8 W.D}{\pi d^3} \left(1 + \frac{1}{2C}\right) \quad \dots \text{(Substituting } D/d = C) \\
 \tau &= \frac{8 W.D}{\pi d^3} K_S
 \end{aligned}$$

Where $K_S = \text{Shear stress factor} = 1 + \frac{1}{2C}$

From the above equation, it can be observed that the effect of direct shear $\left(\frac{8 W.D}{\pi d^3} \left(1 + \frac{1}{2C}\right)\right)$ is appreciable for springs of small spring index C . Also we have neglected the effect of wire curvature in equation (iii). It may be noted that when the springs are subjected to static loads, the effect of wire curvature may be neglected, because yielding of the material will relieve the stresses. In order to consider the effects of both direct shear as well as curvature of the wire, a Wahl's stress factor (K) introduced by A.M. Wahl may be used. The resultant diagram of torsional shear, direct shear and curvature shear stress is shown in Fig. 1.11 (d).

$\therefore$ Maximum shear stress induced in the wire,

$$\begin{aligned}
 \tau &= \frac{8 W.D}{\pi d^3} K \\
 \tau &= \frac{8 W.C}{\pi d^2} K \\
 K &= \frac{4C-1}{4C-4} + \frac{0.615}{C}
 \end{aligned}$$

The values of K for a given spring index (C) may be obtained from the graph as shown in Fig. 1.12.

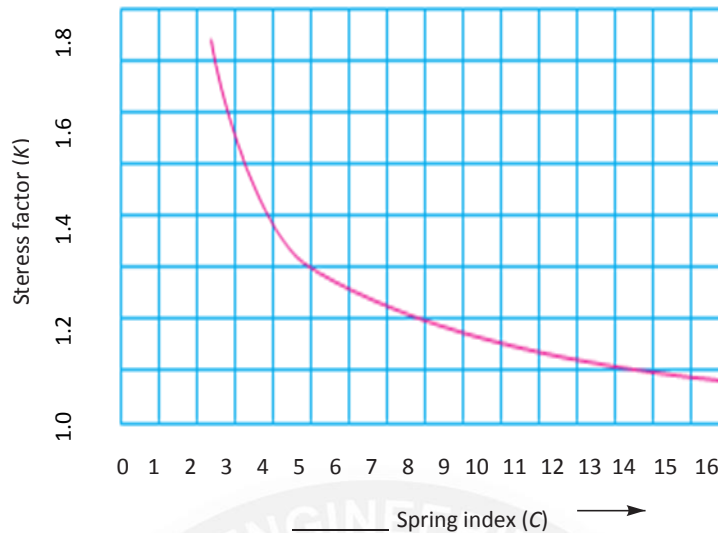


Fig. 1.12. Wahl's stress factor for helical springs.

[Source: "A Textbook of Machine Design by R.S. Khurmi J.K. Gupta, Page: 830]

We see from Fig. 1.12 that Wahl's stress factor increases very rapidly as the spring index decreases. The spring mostly used in machinery have spring index above 3.

Note: The Wahl's stress factor (K) may be considered as composed of two sub-factors, K_S and K_C , such that

$$K = K_S \times K_C$$

where

K_S = Stress factor due to shear, and

K_C = Stress concentration factor due to curvature.

Deflection of Helical Springs of Circular Wire

In the previous article, we have discussed the maximum shear stress developed in the wire. We know that

Total active length of the wire,

$$l = \text{Length of one coil} \times \text{No. of active coils}$$

$$l = \pi D \times n$$

Let θ = Angular deflection of the wire when acted upon by the torque T.

$\therefore$ Axial deflection of the spring,

$$\delta = \theta \times D/2$$

We also know that

$$\frac{T}{J} = \frac{\tau}{D/2} = \frac{G.\theta}{l}$$

$$\theta = \frac{T.l}{J.G}$$

where $J = \text{Polar moment of inertia of the spring wire} = \frac{\pi}{32} \times d^4$

and $G = \text{Modulus of rigidity for the material of the spring wire.}$

Now substituting the values of l and J in the above equation, we have

$$\theta = \frac{T.l}{J.G}$$

$$\theta = \frac{\left(W \times \frac{D}{2}\right) \pi D.n}{\frac{\pi}{32} \times d^4 . G}$$

$$\theta = \frac{16.W.D^2.n}{G.d^4}$$

Substituting this value of θ in equation (i), we have

$$\delta = \frac{16.W.D^2.n}{G.d^4} \times \frac{D}{2}$$

$$\delta = \frac{8.W.D^3.n}{G.d^4}$$

$$\delta = \frac{8.W.C^3.n}{G}$$

and the stiffness of the spring or spring rate,

$$\frac{W}{\delta} = \frac{G.d^4}{8D^3.n}$$

$$\frac{W}{\delta} = \frac{G.d}{8C^3.n} = \text{constant}$$

Eccentric Loading of Springs

Sometimes, the load on the springs does not coincide with the axis of the spring, i.e. the spring is subjected to an eccentric load. In such cases, not only the safe load for the spring reduces, the stiffness of the spring is also affected. The eccentric load on the spring increases the stress on one side of the spring and decreases on the other side. When

the load is offset by a distance e from the spring axis, then the safe load on the spring may be obtained by multiplying the axial load by the factor $\frac{D}{2e+D}$

where D is the mean diameter of the spring.

Buckling of Compression Springs

It has been found experimentally that when the free length of the spring (L_F) is more than four times the mean or pitch diameter (D), then the spring behaves like a column and may fail by buckling at a comparatively low load as shown in Fig. 1.13. The critical axial load (W_{cr}) that causes buckling may be calculated by using the following relation, i.e.

$$W_{cr} = k \times K_B \times L_F$$

where k = Spring rate or stiffness of the spring = W/δ ,
 L_F = Free length of the spring, and
 K_B = Buckling factor depending upon the ratio L_F / D .

The buckling factor (K_B) for the hinged end and built-in end springs may be taken from the following table.

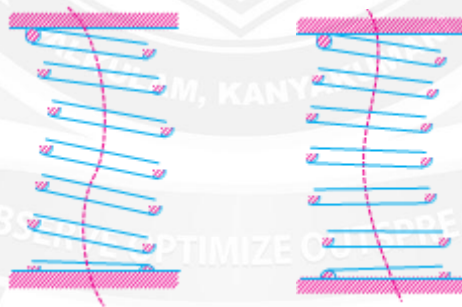


Fig. 1.13. Buckling of compression springs.

[Source: "A Textbook of Machine Design by R.S. Khurmi J.K. Gupta, Page: 832]

Table 1.2. Values of buckling factor (K_B).

L_F / D	Hinged end spring	Built-in end spring	L_F / D	Hinged end spring	Built-in end spring
1	0.72	0.72	5	0.11	0.53
2	0.63	0.71	6	0.07	0.38
3	0.38	0.68	7	0.05	0.26
4	0.20	0.63	8	0.04	0.19

[Source: "A Textbook of Machine Design by R.S. Khurmi J.K. Gupta, Page: 832]

It may be noted that a hinged end spring is one which is supported on pivots at both ends as in case of springs having plain ends where as a built-in end spring is one in which a squared and ground end spring is compressed between two rigid and parallel flat plates. It orders to avoid the buckling of spring; it is either mounted on a central rod or located on a tube. When the spring is located on a tube, the clearance between the tube walls and the spring should be kept as small as possible, but it must be sufficient to allow for increase in spring diameter during compression.

Surge in Springs

When one end of a helical spring is resting on a rigid support and the other end is loaded suddenly, then all the coils of the spring will not suddenly deflect equally, because some time is required for the propagation of stress along the spring wire. A little consideration will show that in the beginning, the end coils of the spring in contact with the applied load takes up whole of the deflection and then it transmits a large part of its deflection to the adjacent coils. In this way, a wave of compression propagates through the coils to the supported end from where it is reflected back to the deflected end. This wave of compression travels along the spring indefinitely. If the applied load is of fluctuating type as in the case of valve spring in internal combustion engines and if the time interval between the load applications is equal to the time required for the wave to travel from one end to the other end, then resonance will occur. This results in very large deflections of the coils and correspondingly very high stresses. Under these conditions, it is just possible that the spring may fail. This phenomenon is called surge. It has been found that the natural frequency of spring should be at least twenty times the frequency of application of a periodic load in order to avoid resonance with all harmonic frequencies up to twentieth order. The natural frequency for springs clamped between two plates is given by

$$f_n = \frac{d}{2\pi D^2 \cdot n} \sqrt{\frac{6 \cdot G \cdot g}{\rho}} \text{ cycles/s}$$

where

d = Diameter of the wire,

D = Mean diameter of the spring,

n = Number of active turns,

G = Modulus of rigidity,

g = Acceleration due to gravity, and

ρ = Density of the material of the spring.

The surge in springs may be eliminated by using the following methods:

1. By using friction dampers on the centre coils so that the wave propagation dies out.
2. By using springs of high natural frequency.
3. By using springs having pitch of the coils near the ends different than at the centre to have different natural frequencies.

Problem 1.1

A helical spring is made from a wire of 6 mm diameter and has outside diameter of 75 mm. If the permissible shear stress is 350 MPa and modulus of rigidity 84 kN/mm², find the axial load which the spring can carry and the deflection per active turn.

Given Data:

$$d = 6 \text{ mm}$$

$$D_o = 75 \text{ mm}$$

$$\tau = 350 \text{ MPa} = 350 \text{ N/mm}^2$$

$$G = 84 \text{ kN/mm}^2 = 84 \times 10^3 \text{ N/mm}^2$$

We know that mean diameter of the spring,

$$D = D_o - d$$

$$D = 75 - 6$$

$$D = 69 \text{ mm.}$$

$$\therefore \text{Spring index, } C = \frac{D}{d}$$

$$C = \frac{69}{6}$$

$$C = 11.5$$

Let W = Axial load, and

δ / n = Deflection per active turn.

1. Neglecting the effect of curvature

We know that the shear stress factor,

$$K_S = 1 + \frac{1}{2C}$$

$$K_S = 1 + \frac{1}{2 \times 11.5}$$

$$K_S = 1.043$$

and maximum shear stress induced in the wire (τ),

$$\tau = \frac{8 W.D}{\pi d^3} K_S$$

$$350 = \frac{8 W \times 69}{\pi 6^3} 1.043$$

$$350 = 0.848 W$$

$$W = 350 / 0.848$$

$$W = 412.7 \text{ N.}$$

We know that deflection of the spring,

$$\delta = \frac{8.W.D^3.n}{G.d^4}$$

$\therefore$ Deflection per active turn,

$$\frac{\delta}{n} = \frac{8.W.D^3}{G.d^4}$$

$$\frac{\delta}{n} = \frac{8 \times 412.7 \times (69)^3}{84 \times 10^3 \times 6^4}$$

$$\frac{\delta}{n} = 9.96 \text{ mm.}$$

2. Considering the effect of curvature

We know that Wahl's stress factor,

$$K = \frac{4C-1}{4C-4} + \frac{0.615}{C}$$

$$K = \frac{(4 \times 11.5) - 1}{(4 \times 11.5) - 4} + \frac{0.615}{11.5}$$

$$K = 1.123$$

We also know that the maximum shear stress induced in the wire (τ),

$$\tau = \frac{8 W.C}{\pi d^2} K$$

$$350 = \frac{8 W \times 11.5}{\pi 6^2} 1.123$$

$$350 = 0.913 W$$

$$W = 350 / 0.913 = 383.4 \text{ N.}$$

and deflection of the spring,

$$\delta = \frac{8.W.D^3.n}{G.d^4}$$

$\therefore$ Deflection per active turn,

$$\frac{\delta}{n} = \frac{8.W.D^3}{G.d^4}$$

$$\frac{\delta}{n} = \frac{8 \times 383.4 \times (69)^3}{84 \times 10^3 \times 6^4}$$

$$\frac{\delta}{n} = 9.26 \text{ mm}$$