

1.9 FEEDWATER TREATMENT

Boiler make-up water to the extent of 1.5—2 percent of the total flow rate is required to replenish the losses of water through leakage from fittings and bearings, boiler blow down, escape with non-condensable gases in the deaerator, turbine glands, and other causes.

1. Prevention of hard scale formation on the heating surfaces
2. Elimination of corrosion
3. Control of carry-over to eliminate deposition on superheater tubes, and
4. Prevention of silica deposition and corrosion damage to turbine blades.

Raw water is, therefore, first pre-treated and then demineralized. For once through boilers and boiling water nuclear reactors, which require high water purity, a condensate polishing system is used to further polish the water. Raw water contains a variety of impurities, such as (a) Suspended solids and turbidity, (b) organics, (c) hardness (salts of calcium and magnesium), (d) alkalinity (bicarbonates, carbonates, and hydrates), (e) other dissolved ions (sodium, sulphate, chloride, etc.), (f) silica and (g) dissolved gas(O₂, CO₂). The extent of pre- treatment depends on the source of raw water.

External treatment

The first step of pre-treatment of boiler feed water is clarification, in which the

water is chlorinated to prevent biofouling of the equipment. The suspended solids and turbidity are coagulated by adding special chemicals (like aluminium sulphate, $Al_2(SO_4)_3$) and agitated. The coagulated matter settles at the bottom of the clarifier and is removed.

If the turbidity of clarified effluent is high, positive filtration is needed. Both gravity filters and pressure-type filters are used, but the latter is preferred. A granular medium like sand is commonly used for filtration. The pressure difference across the filtering medium is an indication of solid accumulation. When it reaches a given limit, the solids are removed from the bed by backwashing. Further filtration by activated carbon can absorb organics and remove residual chlorine from the chlorination process.





The dissolved salts of calcium and magnesium give to water a quality called hardness. Hardness is characterized by the formation of insoluble precipitates or curds with soaps, and is usually measured with a standard soap test. All natural waters are hard and contain scale-forming impurities which are mainly the salts of calcium and magnesium in the form of carbonates, bicarbonates, chlorides and sulphates. The hardness is expressed in ppm of dissolved salts. Softening of water, i.e. removal of hardness from water, can be done by lime-soda process, phosphates process, zeolite process and demineralization.

Lime—soda process

In lime—soda softening, calcium and magnesium salts are removed using lime

(calcium hydroxide) and soda ash (sodium carbonate). When this process is carried out at normal raw-water temperature, it is called a “cold process” softening; and when carried out at or near the boiling point, it is referred to as a “hot process” softening. Since heating greatly accelerates the necessary reactions, the hot process is preferred for boiler water treatment, where most of the energy used in heating the water may be retained in the cycle.

The representative reactions are given below:




The products, calcium carbonate and magnesium hydroxide are insoluble in water and settle to the bottom of the vessel. The softened effluent is then passed through sand or charcoal filters before usage.

Hot phosphate Softening



In the hot phosphate softening process, calcium and magnesium hardness is removed using phosphate and caustic soda, Tricalcium phosphate ($\text{Ca}_3(\text{PO}_4)_2$) and magnesium hydroxide are precipitated. The process is carried out at a temperature of 100°C or above. Since the hot phosphate process requires more expensive chemicals than the lime—soda process, it is used where the initial water hardness is 60 ppm or

less. Where hardness is greater than this, a lime soda process may be used first, followed by a phosphate clean-up. The representative reactions are given below:




Sodium Zeolite Softening

Water can be softened by passing it through a bed of sodium zeolite, which may be natural compounds of sodium aluminium silicate, with the cations of calcium and magnesium removed in the process.



The softening capacity of the bed gets exhausted in course of time, and the bed can be regenerated by flushing it with brine (NaCl),





Zeolite softening is not ideal for the following reasons: (i) Water of high or low pH have a deleterious effect on zeolites, (ii) high temperatures also have a bad effect, (iii) turbid waters coat the zeolite material, reducing its efficiency, (iv) there is no reduction in

alkalinity or total solids, (v) there can be silica gain in water from the zeolite, (vi) with low content of calcium, the water can be corrosive, sodium zeolite softening in conjunction with the use of evaporating may be more effective.

Hydrogen Zeolite softening

When water containing calcium, magnesium and sodium ions is passed through a hydrogen zeolite, these ions are exchanged for hydrogen and the bicarbonate, sulphate, chloride and nitrate radicals are converted to their respective acids.

When the hydrogen zeolite becomes exhausted, it is backwashed and regenerated with acid. After being rinsed, it is ready for use again. Sulphuric acid is generally used for regeneration because of its relatively low cost.



Anion exchangers

Anion exchangers can remove the anions like chlorides, sulphates and nitrates (acid forms) present in hydrogen zeolite effluent by resinous materials which absorb them.

Typical reactions are:




Carbonic acid is removed by aeration. When the acidic water is sprayed in a

shower to expose large surface area, the carbon dioxide gas is released.



When the anion exchanger is exhausted, it is regenerated by backwashing with soda ash



Demineralizing plant

The process of removing dissolved solids in water by ion exchange is called demineralization. Two types of resins, cation and anion, are used. The cation resin is the hydrogen zeolite where the hydrogen ion is exchanged for the cations calcium, magnesium and sodium, and the anion resin adsorbs the anions chlorides, nitrates and sulphates, as discussed above. Both ion-exchange processes are reversible, and the resins are restored to their original form by regeneration.

A typical Demineralizing plant consisting of a cation exchanger, an anion exchanger, a degasifier and a silica adsorber in series is shown in Fig.31. In the degasifier, carbon dioxide gas is removed by aeration. Silica in water is very detrimental at high pressure. It vaporizes at high pressure and flows with steam, condenses on turbine blades in the form of hard glassy scales which are difficult to remove. Magnesium hydroxide is often used to adsorb silica from water.

The membrane treatment for removing the total dissolved solids from make-up water is also an energy efficient process and is gradually gaining more acceptances. It

uses the principle of either reverse osmosis or electro dialysis. The driving force for reverse osmosis is the application of counter pressure to normal osmotic pressure, driving water molecules through the membranes in preference to dissolved salts.

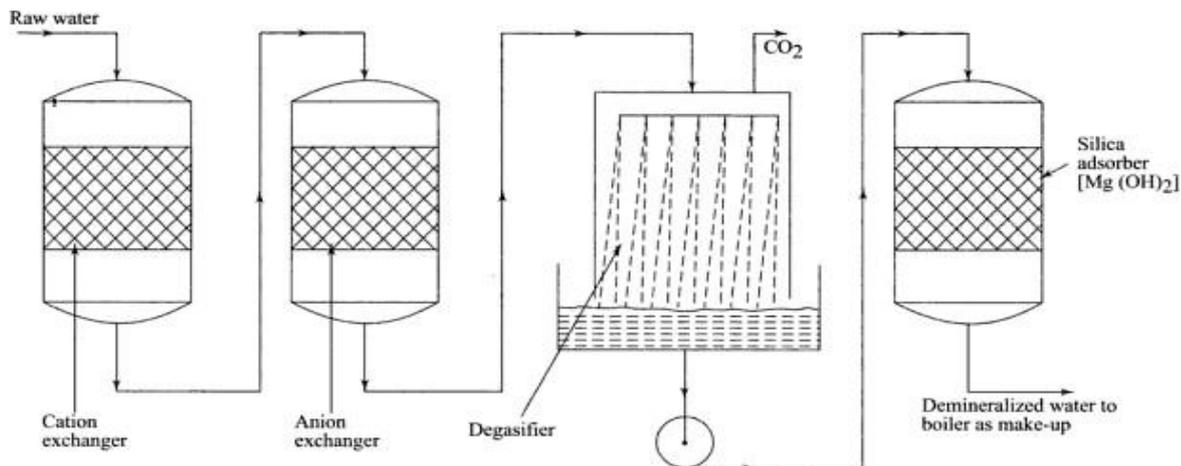


Figure 1.8.1 A typical Demineralizing plant

[Source: "power plant Engineering" by Anup Goel ,Laxmikant D.jathar,Siddu :65]

Condensate polishing

A high quality make-up water can be produced for the plant by using Demineralizing systems as discussed above. However, this treated water while flowing through the cycle can pick up impurities due to condenser leakage from the circulating water through the tubes as well as metallic ions, such as iron and copper, from pipelines.

Condensate polishing is accomplished by passing the condensate through large Demineralizing vessels, called mixed bed units, which contain both cation and anion

resins. The resins not only remove dissolved salts in the above manner, but also act as filters for impurities or suspended solids. Power plants using once-through boilers and nuclear reactors generally require high quality water and use condensate polishing systems.

